



1 Tier, 3 Bank Recessed Units (2003R thru 4003R Series)



Electrical Requirements: 120VAC, 60 Hertz, Single Phase
Power Rating: 3.6A
Rough Opening Dimensions: 21" x 44 11/16"

c  us LISTED UL/CUL Approved

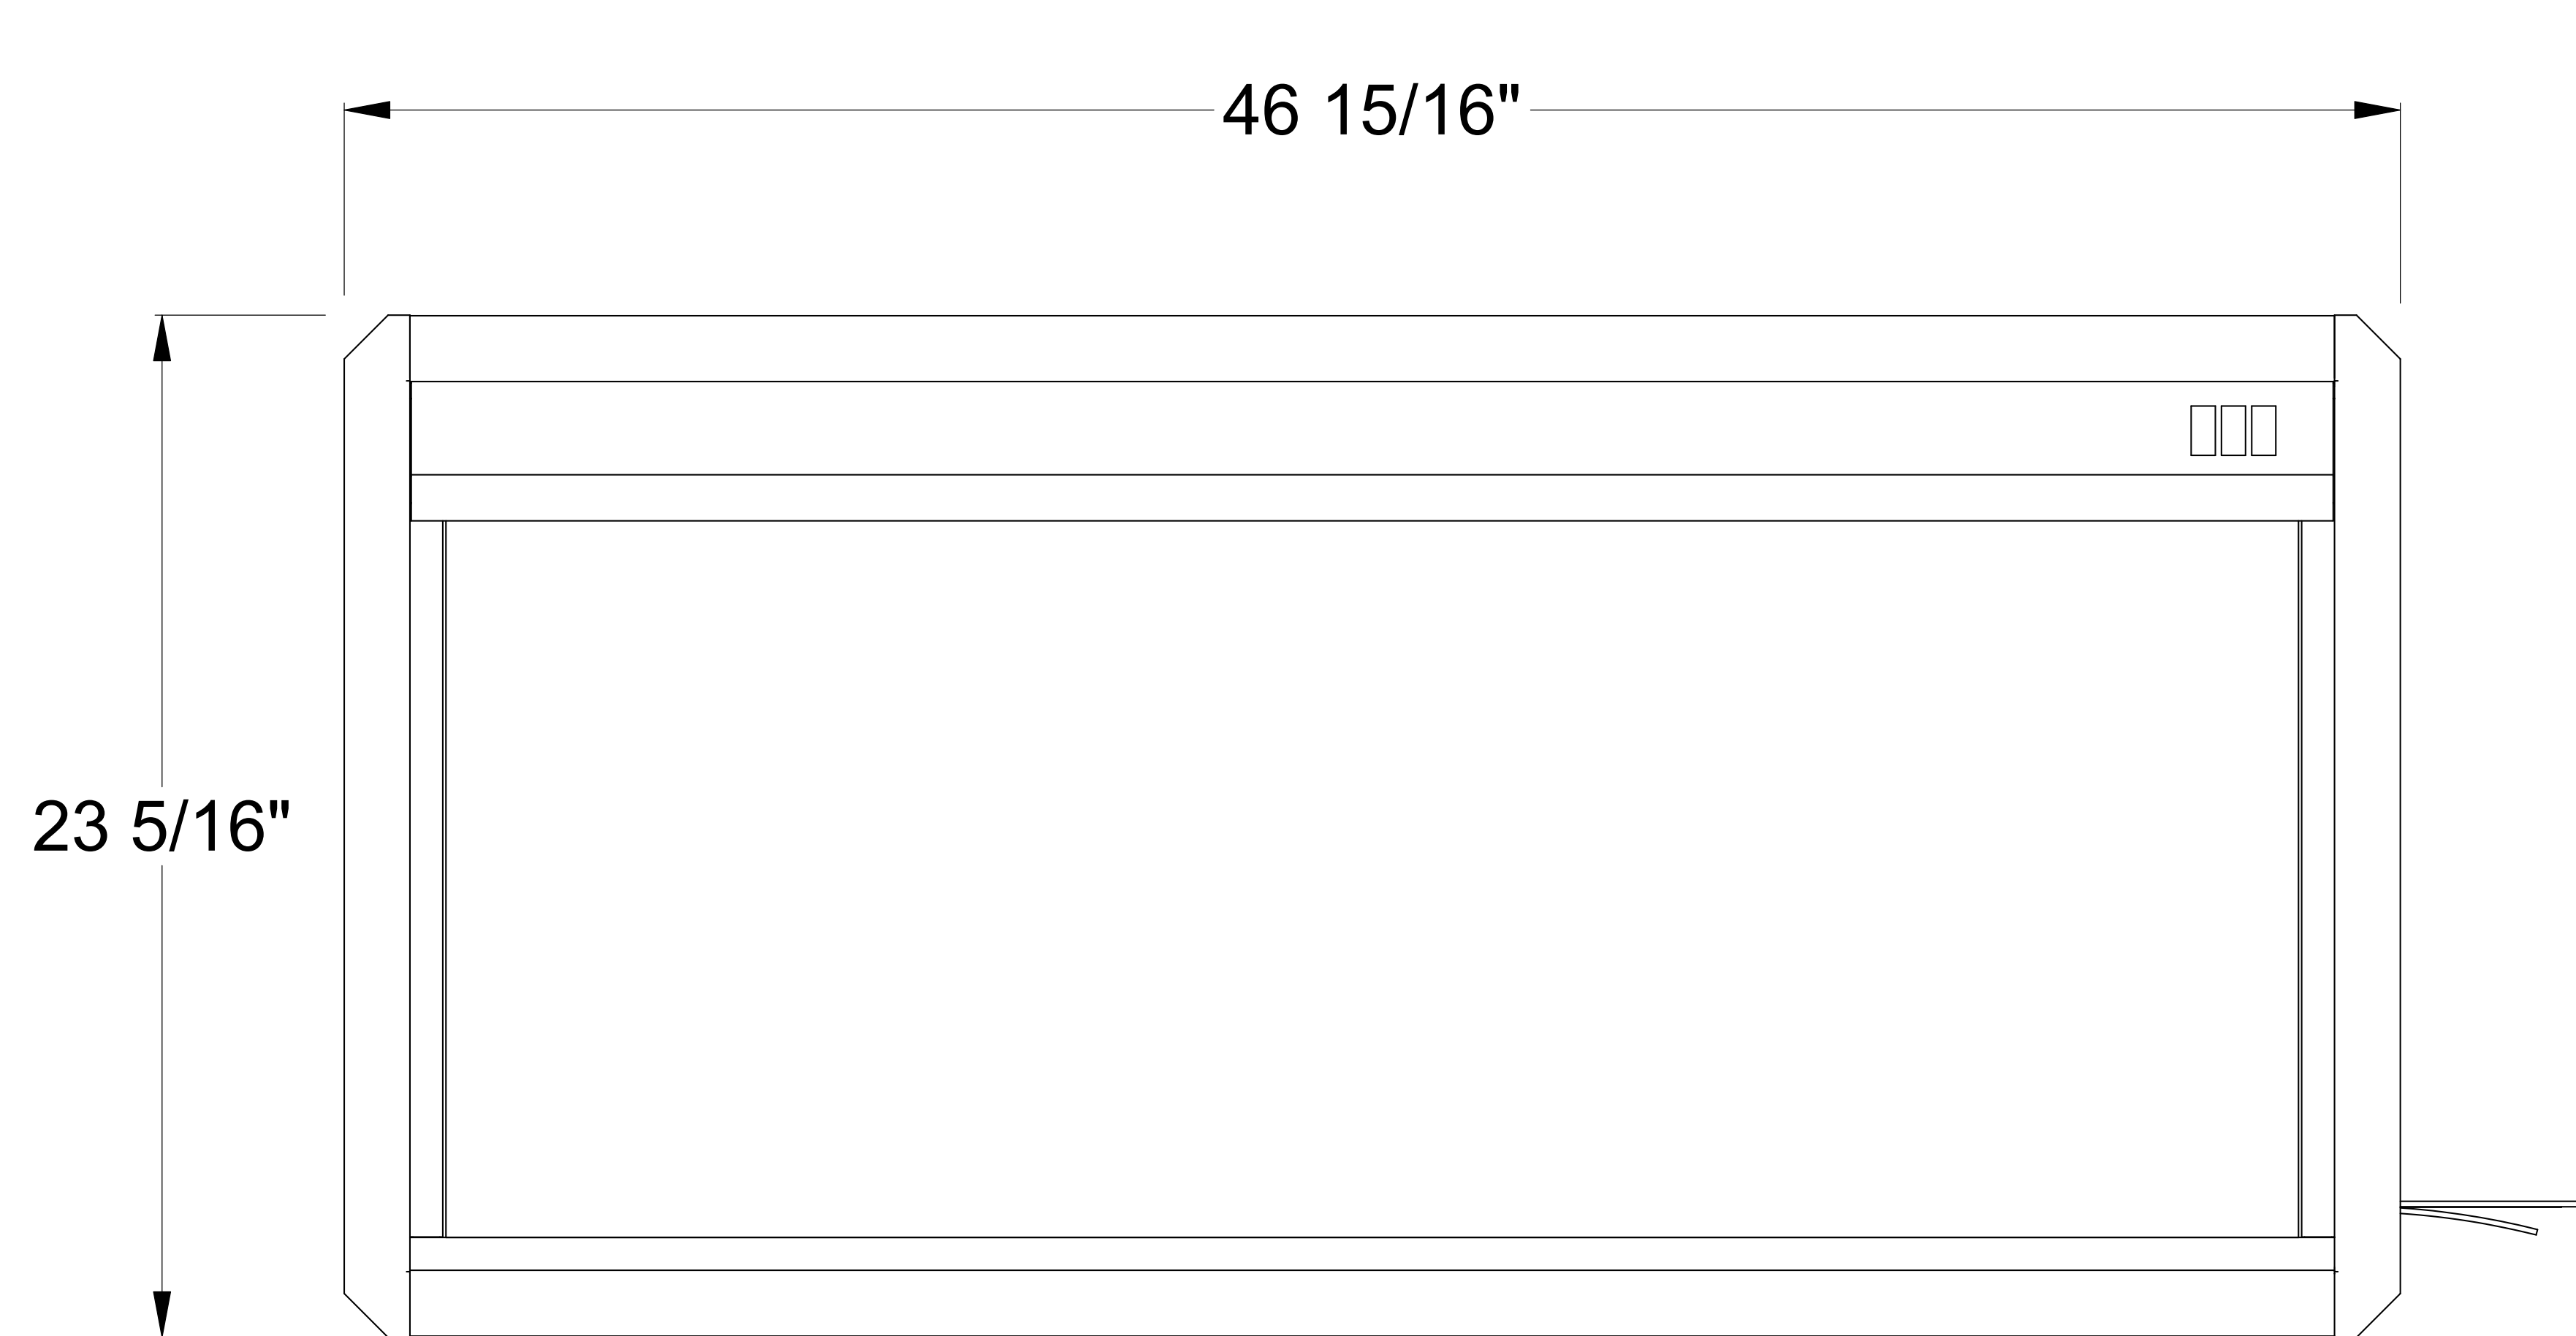