


2 Tier, 3 Bank Recessed Units (2033R thru 4033R Series)

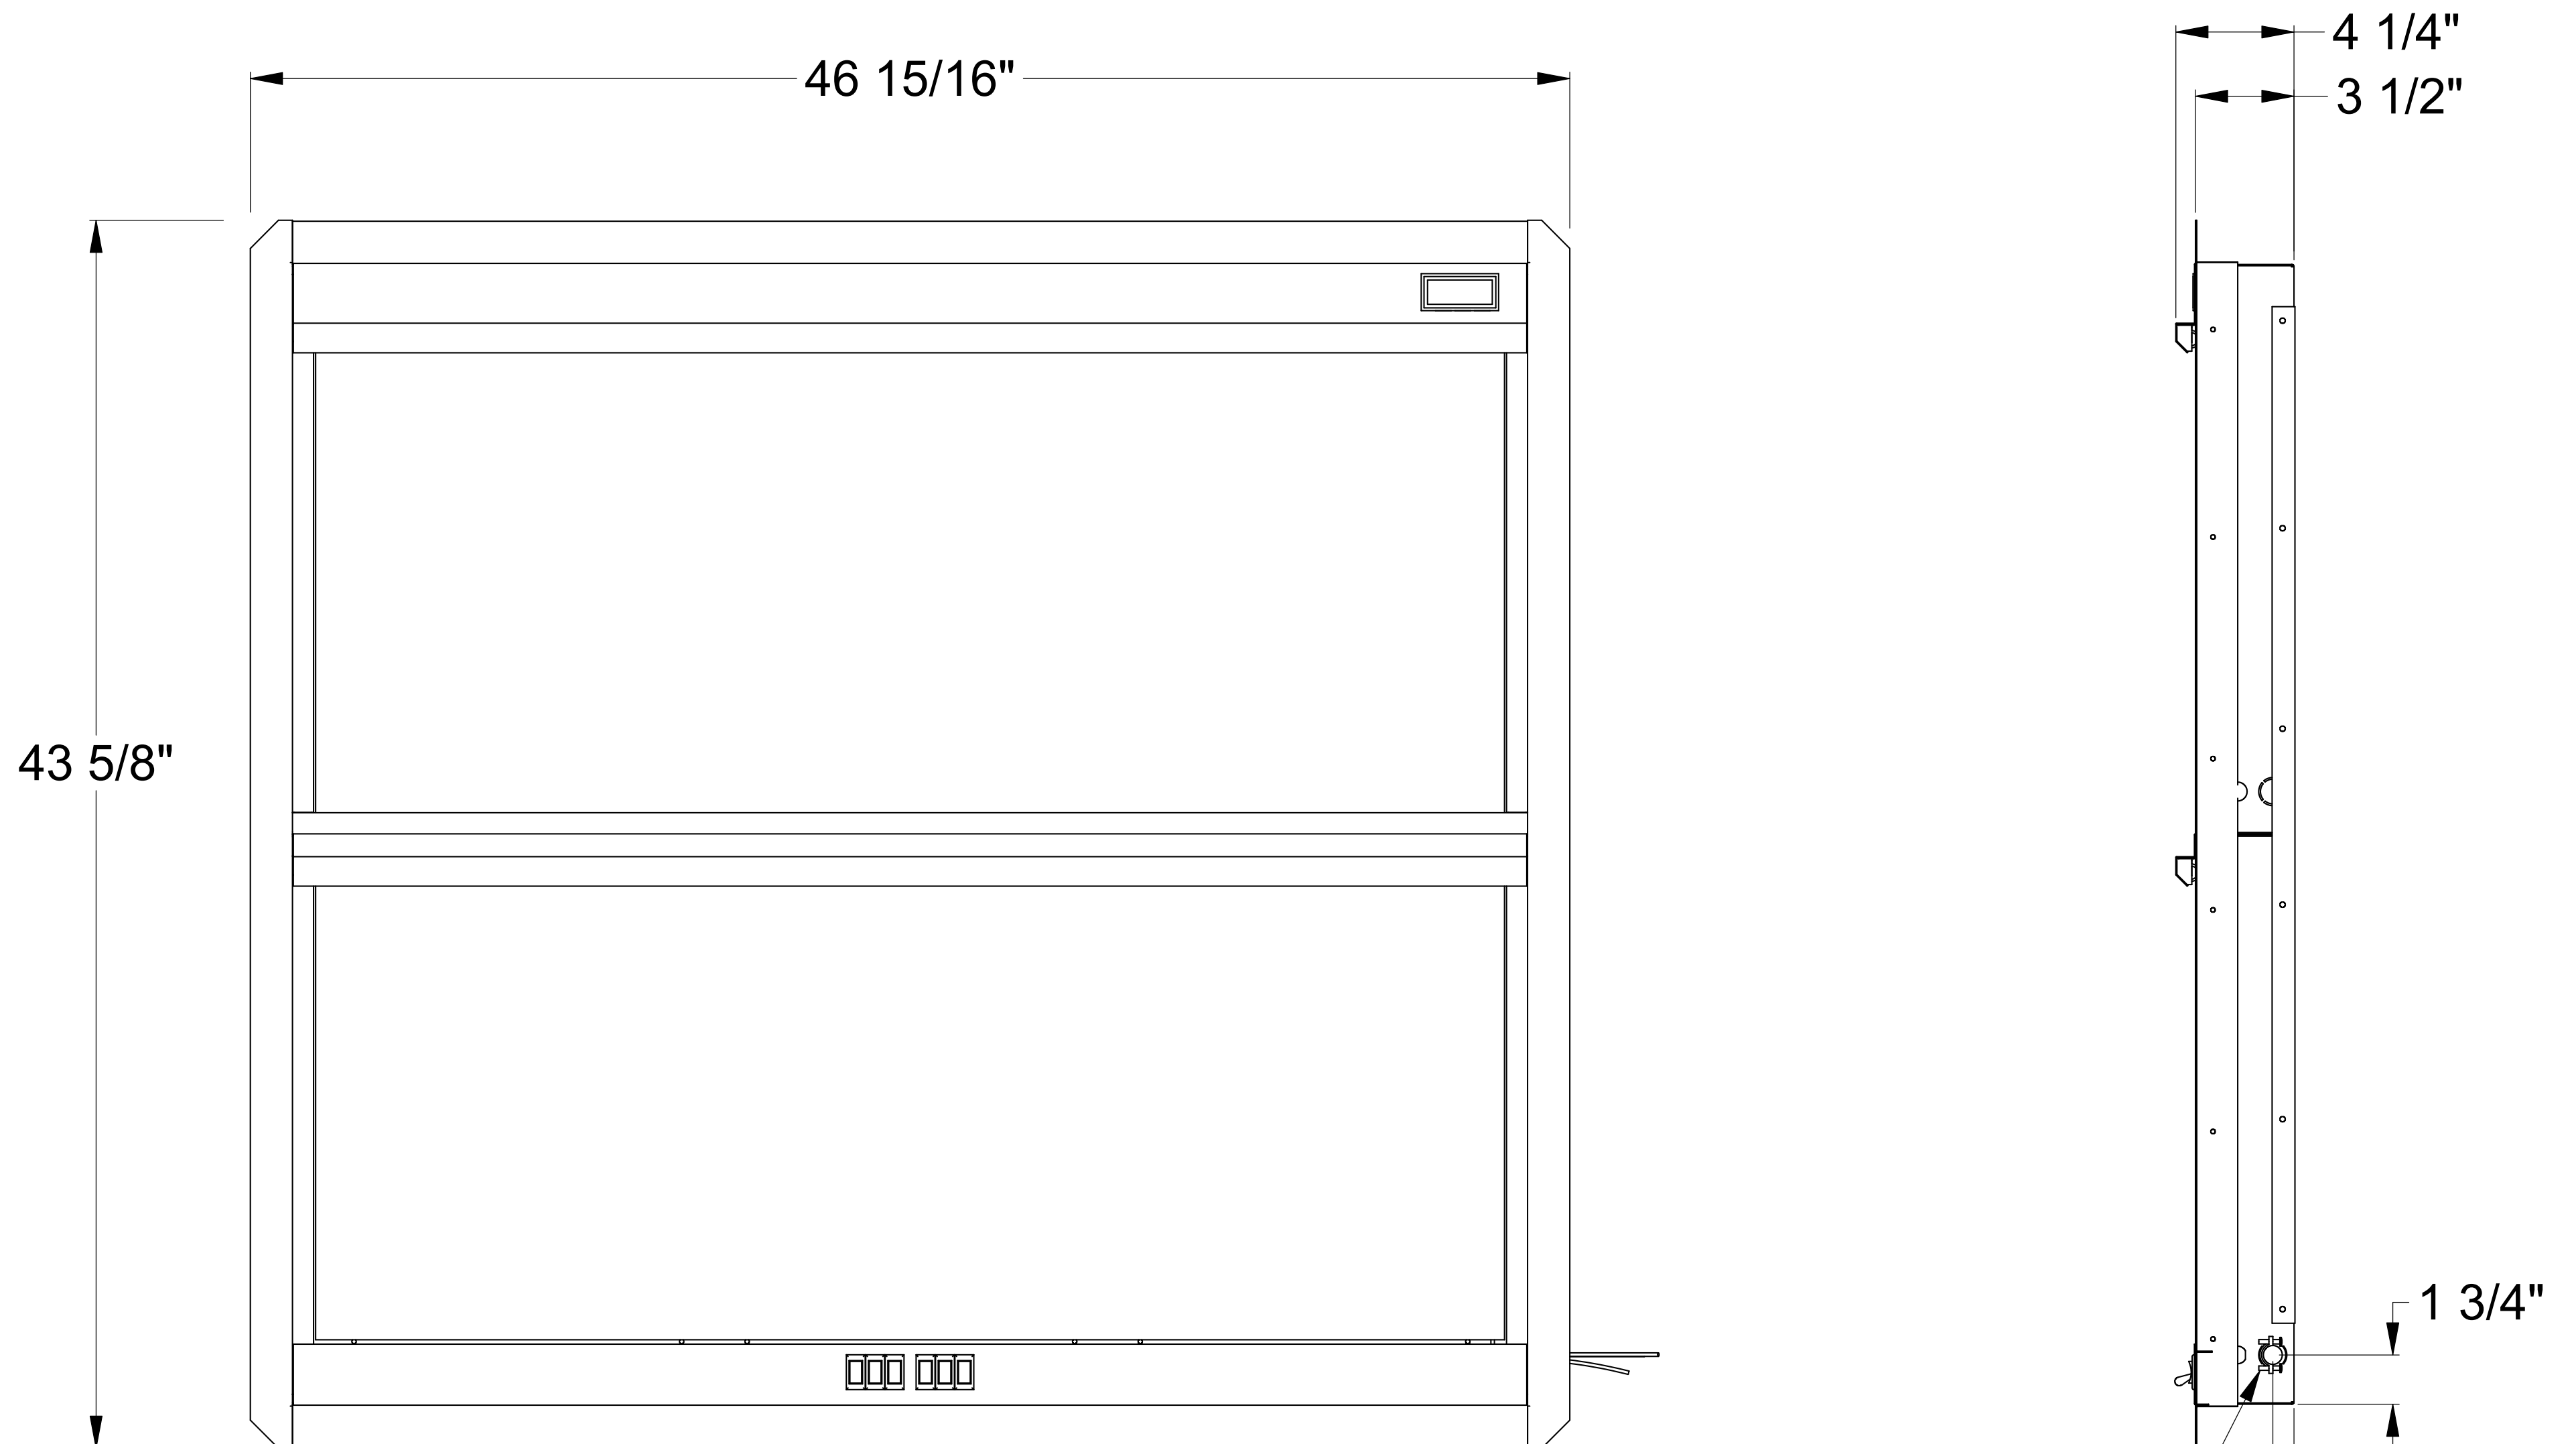

Electrical Requirements: 120VAC, 60 Hertz, Single Phase
Power Rating: 7.2A
Rough Opening Dimensions: $41 \frac{1}{4}$ " x $44 \frac{11}{16}$ "

 **UL** us LISTED UL/CUL Approved

STANDARD LOCATION
FOR HARDWIRE